


# LW 280 E



A slow running compressor for medium sized applications. Pneumatic/electric compressor control with final pressure cut off and automatic condensation drain ensure simple and trouble free operation. The 3 stage, 3 cylinder block ensures low maintenance with minimal wear and tear. The components are industrial quality over dimensioned, for ultimate reliability. The compressor is fitted as standard with 4 filling hoses and filling valves to make a complete, compact unit.

## Specifications

- >> Ready to connect compressor, fully wired with pneumatic/electric compressor control with star/delta start cycle
- >> Operating panel with start/stop and condensation test controls, stop button, pressure gauge and hours counter
- >> Automatic condensation drain, pressure free start/stop, leak check function and safety valve check test modes
- >> Automatic shut down when final pressure is reached
- >> Safety cut off if the cover is opened, Emergency off switch
- >> Sturdy steel frame, powder coated in RAL 6026
- >> All pistons with piston rings
- >> 3 coaxial suction/pressure valves
- >> Low pressure oil pump and filter
- >> Oil/water separators after each stage, safety valve for each stage
- >> Breathing air purification In accordance with EN 12021
- >> Pressure maintaining and non-return valve
- >> 4 Filling hoses and filling valves and/or HP outlet

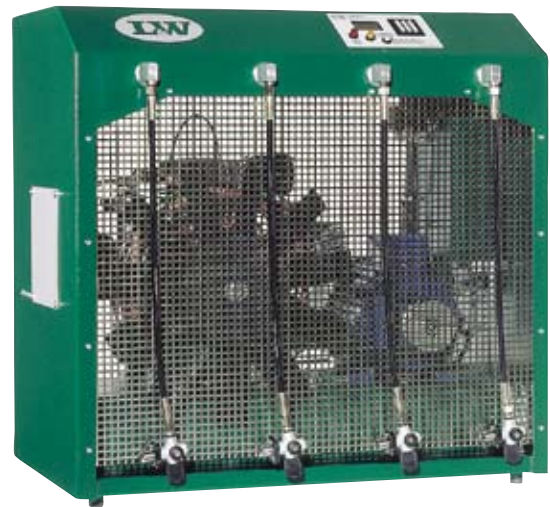

## Options

- >> 200/300 bar parallel filling pressures
- >> Motor protection switches
- >> Special voltages/frequencies:  
440 V 60 Hz / 230V 50Hz / 230V 60Hz
- >> Oil pressure monitoring with auto shut down
- >> Auto start
- >> Oil pressure gauge
- >> Cylinder temperature with auto shut down
- >> Oil temperature with auto shut down
- >> Inter stage pressure gauges
- >> Puracon Filter monitoring

# Technical Data

LW 280 E	
Type:	Air cooled, reciprocating piston compressor
Capacity [litre/min] / [Nm <sup>3</sup> /h] / [cfm]:	280 / 16.8 / 9.9
Max. Pressure [bar]:	350 (set at the final stage safety valve)
RPM:	1300
No of cylinders / No of stages:	3 / 3
Bore 1st stage [mm]:	95
Bore 2nd stage [mm]:	40
Bore 3rd stage [mm]:	18
Stroke [mm]:	44
Prime mover type:	3 Phase E-motor 400V / 50Hz
Drive power [kW] / [HP]:	7.5 / 10.0
Cooling air requirement [Nm <sup>3</sup> /h]:	2250
Lubrication type:	Oil pump
Oil capacity [litre]:	1.8
Oil pressure [bar]:	1.8 (+/- 0.3)
Air outlet temperature [°C]:	8 - 10°C above ambient
Filter capacity [m <sup>3</sup> at +20°C] <sup>1)</sup> :	900
Dimensions L x W x H [cm]:	110 x 60 x 98
Weight [kg]:	240
Noise level [dB]:	83 (measured at 1 m distance)

<sup>1)</sup> In accordance with EN 12021

## Lenhardt & Wagner GmbH

Bensheimer Strasse 100

64653 Lorsch/Germany

Telefon: +49 (0)62 51 - 10 74 -0

Telefax: +49 (0)62 51 - 10 74 -14

eMail: info@lw-compressors.com